

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
19 July 2001 (19.07.2001)

PCT

(10) International Publication Number
WO 01/51976 A1

(51) International Patent Classification⁷: **G02B 6/43, 6/12**

(21) International Application Number: **PCT/GB01/00035**

(22) International Filing Date: **5 January 2001 (05.01.2001)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0000405.1 11 January 2000 (11.01.2000) GB

(71) Applicant (for all designated States except US): **BAE SYSTEMS PLC** [GB/GB]; Warwick House, P.O. Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ALDRIDGE, Nigel, Bruce** [GB/GB]; 7 Russet Court, Kingswood, Wotton-u-Edge, Gloucestershire GL12 8SG (GB). **PROUDLEY, Geoffrey, Martland** [GB/GB]; Primrose Cottage, 3 Bradley Green, Wotton-u-Edge, Gloucestershire GL32 7PP (GB). **FOOTE, Peter, David** [GB/GB]; Warren Fields

Farm, Trellech, Monmouth NP25 4PQ (GB). **READ, Ian, James** [GB/GB]; 25 Yew Tree Drive, Kingswood, Bristol BS15 4UA (GB).

(74) Agent: **FLETCHER WATTS, Susan, Jane**; BAE Systems plc, Group IP Dept., Lancaster House, P.O. Box 87, Farnborough Aerospace Centre, Farnborough, Hampshire GU14 6YU (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.-


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page].

(54) Title: IMPROVEMENTS RELATING TO INTERFACING OPTICAL TRANSMISSION STRUCTURES

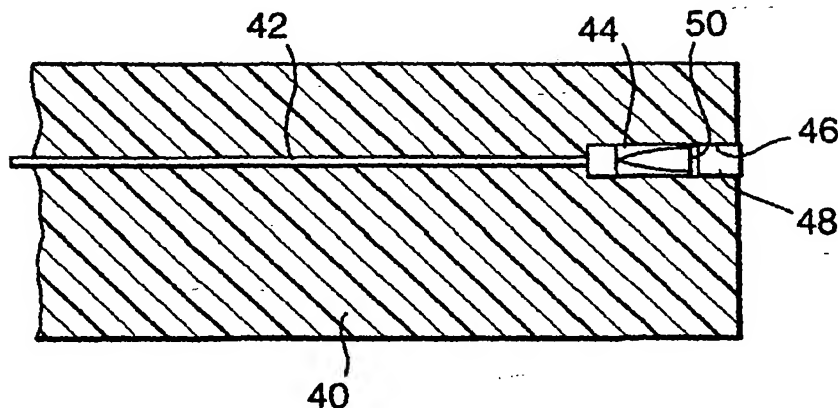

(57) Abstract: A composite (40) for use in the aircraft construction industry comprise an optical transmission means (42), such as an optical fiber, embedded within a carrier. The optical transmission means is provided with a high-quality optical interface surface (50) which provides a means for optical connection to the optical transmission means (42) from outside the carrier. The optical interface surface (50) is provided as part of a micro-optical component (44) which processes the optical signals to improve light extraction from and supply to the optical transmission means (40). The buried optical transmission means is accessed by a passageway (56, 66) formed in the carrier to the interface surface (50). If the passageway (56, 66) is formed prior to completion of finishing processes on the composite, a protective plug (48) is provided to close the passageway (56, 66) until the optical connection is required.

WO 01/51976 A1

WO 01/51976 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Improvements Relating to Interfacing Optical Transmission Structures.

The present invention concerns improvements relating to interfacing optical transmission structures and more particularly, thought not exclusively, to an apparatus for coupling a first
5 optical transmission means, such as an optical fibre, embedded within a composite such as an aircraft panel to a second optical transmission means, such as an optical fibre, external to the composite. The present invention also concerns such an apparatus which can provide a coupling in a minimal number of steps thereby simplifying the coupling procedure.

10 The phrase 'embedded within a composite' in the context of the present invention is intended to mean that, at a possible point of connection, the article is completely surrounded by the composite and is located beneath the exterior surfaces of the composite after manufacture. Such an embedded article is not exposed to the exterior surface and can only be accessed by entering the interior of the composite.

15

The term 'composite' as used herein is to be construed broadly, in that it is directed to any support structure for carrying a light transmission means. Typical composites are aircraft panels, and other supportive structures made from plastics materials, carbon fibre, glass or metal for example and include multi-layer structures.

20

The use of optical fibres and advanced composites is becoming more accepted in the aircraft industry over the previous systems of lightweight metals and electrical wiring. There are many advantages to the use of optical fibres, such as reduced weight, elimination of electromagnetic problems, such as noise pick up and incidental radiation of signals, lower
25 raw material costs, and elimination of potentially dangerous conductive paths. Whilst these advantages are clearly desirable, the use of optical systems in aircraft has its own specific characteristics, different to those associated with conventional systems, which have to date slowed acceptance of this new technology.

30

Fibre optics embedded in composite structures can provide elegant distributed and embedded sensing functions (e.g. of strain, temperature) as well as the potential for embedded communications links. Despite the proven functionality of such embedded optical fibre structures, problems remain as to the best way of interfacing (i.e. launching and extracting

light) to/from the embedded optical fibres. One way, described in US 5,299,273, involves attaching a relatively large optical connector to a composite laminate part having an optical fibre embedded therein. The optical connector is attached by trimming the structure across the path of the optical fibre thereby exposing an end of the fibre that lies flush with the surface of the structure. Then the optical fibre is polished and the connector is fitted using micro-positioning techniques to correctly align the connector and optical fibre.

Other current solutions include allowing delicate embedded fibres to emerge from the structure surface or edge (so called 'flying leads'), or embedding fibre connectors in a surface of the composite at the ends or sides of embedded optical fibres for subsequent connection to external optical devices or other optical fibres. Examples of the latter type of coupling are shown in US 5,809,197 and in the paper by S. Meller, J. Greene, C. Kozikowski, K. Murphy, R. Claus, "Polymer and Metal-Matrix Composite-Embedded Optical Fibres for Avionics Communications Links," SPIE Proceedings, Vol. 3042, pp. 383-388, 1997.

The provision of 'flying leads' is problematical in that these are potential single points of failure during use of the composite. As well as being prone to damage, the fibres must be managed during composite manufacture (lay-up) which will increase manufacturing complexity, time and cost. Likewise, the provision of conventional embedded connectors at the composite surface can also complicate the manufacturing process particularly since these embedded connectors tend to be rather bulky and require careful protection. Additionally, resin accretion can occur round these connectors (and also in the case of flying leads) which can lead to embrittlement and contamination effects.

Generally, all of the above methods suffer from the problems of potential damage to the optical fibres emerging out of the composite and to the embedded connectors present at the surface of the composite when the composite needs to be 'finished' in its manufacturing process. These problems have hindered the universal acceptance of embedded optical fibre systems within the aircraft industry.

It is desired to overcome or at least substantially reduce the above described problems.

The present invention resides in the appreciation that embedded optical connectors need not be exposed at a surface of the composite until after manufacturing processes, such as trimming and routing, on the composite have been completed. Once these manufacturing processes are complete, the embedded optical connector can be located and a passageway to it
5 formed in the composite. In this way, the above described problems can be substantially alleviated.

More specifically, according to one aspect of the present invention there is provided a composite comprising an optical transmission means embedded within a carrier, and a high-
10 quality optical interface surface provided within the carrier in connection with the optical transmission means, the optical interface surface providing a means for optical connection to the transmission means from outside the carrier.

The present invention allows the optical transmission means to be hidden (inaccessible)
15 within the composite, until such time as required, namely post manufacture of the composite. Then access to the transmission means can be recovered as required. This concept of complete embedment and recovery, post-manufacture also advantageously allows redundancy to be built into the composite. Spare embedded optical transmission means and interface optics could be embedded within the composite but remain hidden in the structure until
20 required, for example if an existing optical transmission means and interface becomes damaged. These links would also be hidden at the time of manufacture of the composite and require no external management of delicate trailing leads for example. When a new optical communication channel or sensing function is required, the location of a selected transmission means and its high-quality interface surface can be detected and an appropriate
25 passageway to the interface formed for access thereto. Accordingly, additional links and/or sensing functions can be provided without the need for additional optical transmission means external to the composite.

The present invention also provides benefits in terms of reduced manufacturing complexity,
30 time and cost. The total number of operations required to establish a connection may also be reduced as compared to the conventional systems. Furthermore, it is considered that the present invention will speed the implementation of embedded optical fibre systems in the aerospace industry.

The high-quality optical interface surface is provided at the time when the first optical transmission means is embedded within the composite. The term 'high-quality optical interface surface' as used in the present invention is intended to denote a surface which can be coupled to another optical surface and provide an acceptable optical interface (having an acceptably low level of signal loss) without the need for quality enhancing measures such as polishing of the surface. By providing such a high-quality surface, the interconnection to the first optical transmission means is made simpler in that there is no need to provide extra processing steps, such as polishing, to create an acceptable quality optical interface for light transmission.

Preferably the composite comprises a passageway formed within the carrier to the embedded optical transmission means from an exterior surface of the carrier. This is conveniently formed after the manufacturing processes have been completed such that the optical transmission means and its high-quality optical interface are not damaged by the processes.

The composite may further comprise a protective plug provided in the passageway for closing the passageway; the protective plug being removable prior to forming an optical connection. In this way, access to the first optical transmission means advantageously can be established prior to completion of any manufacturing processes on the composite and the optical transmission means and its high-quality optical interface can be protected by the provision of the plug.

When the passageway is to be formed using a laser, the composite preferably further comprises means for preventing light used in the laser irradiation from being optically coupled with the optical transmission means. The purpose of such means is to prevent any damage occurring to the optical transmission means which may be caused by the wavelength of the laser radiation.

In this regard, the preventing means is preferably arranged to differentiate between the wavelengths of the light used in the laser machining step and the light used in the optical transmission means, and to prevent transmission of light used in the laser machining step to the optical transmission means. This provides a way of preventing optical coupling between

the laser light and the optical transmission means which advantageously uses a minimal number of components. The two wavelengths can be differentiated e.g. by a wavelength selective mirror or beam splitter. Once the two wavelengths of light can be differentiated, one additional way of preventing the optical coupling is for the preventing means to be arranged to transmit the light used in laser the machining step to at least one light beam absorbing means provided within the composite.

In order to determine the location of the optical transmission means and its interface, the composite may further comprise an embedded detectable location means arranged to indicate the location of the high-quality optical interface surface within the composite. This is useful when the material of the composite and the optical transmission means are not easily differentiated by the locating process.

The locating means may comprise an embedded position marker within the carrier. In addition, the composite may comprise a depth marker also embedded within the carrier to indicate when the passageway has been formed to the correct depth. This is particularly useful in laser machining where the light used for ablation can also be monitored for reflection to determine when a reflective marker representing a correct depth has been reached.

In an embodiment of the present invention, the depth marker comprises the position marker and hence the number of additional components is advantageously reduced. Also, the position marker or the depth marker may comprise a sacrificial coating which is arranged to be removable after formation of the passageway to access the optical transmission means. In this way, the precise depth of the passageway can be controlled with high accuracy.

The optical transmission means may comprise a thermal expanded core optical fibre at its optical interface surface. This reduces the alignment constraints at the point of interconnection thereby easing the interconnection process.

The composite may further comprise an alignment structure embedded within the carrier for aligning an interface means with the optical transmission means at the optical interface surface. The use of an alignment structure advantageously speeds up the interconnection

process as an accurate interconnection can be made without undue delay which may otherwise be caused by the use of other alignment procedures.

5 The composite may further comprise optical processing means embedded within the carrier and being optically connected to the optical transmission means for processing light to or from the optical transmission means and providing the optical interface surface. Whilst there is always some loss with an optical coupling, the optical processing means can enhance a signal at the optical interface to improve the efficiency of the optical coupling. In addition, the light from the transmission means can be manipulated to optimise its extraction from the composite. For example, the optical processing means may comprise means for steering a light beam. More specifically, the steering means may comprise a beam splitter or a micro-turning mirror. Also the optical processing means may comprise means for collimating a light beam and the light beam collimating means may comprise a graded index lens or a graded index fibre. All of these different means for manipulating the light beam can advantageously
10 15 configure the interfacing process to optimise transmission characteristics regardless of the desired location of input/output to/from the composite.

The composite may further comprise a micro-substrate on which the optical processing means is provided and secured to the optical transmission means. This advantageously provides a
20 secure, strain-relieving connection between the optical processing means and the optical transmission means. Furthermore, the orientation of the optical processing means can be controlled as the micro-substrate may be more readily alignable than the optical processing means itself.

25 The alignment structure is preferably provided on the micro-substrate. In this way, a single micro-structure need only be prepared to implement several functions without the need for other specialist structures. This advantageously reduces costs.

The optical transmission means may comprise an elongate structure and the optical interface
30 surface may be provided at a side of the elongate structure. In this case, the optical interface surface is preferably provided by an evanescent coupling means optically connected to the optical transmission means. This is an efficient way of dividing out some of the optical signal from the optical transmission means.

The optical transmission means preferably comprises an optical fibre because this is one of the most cost-effective and efficient optical transportation systems currently available.

- 5 The composite preferably comprises micro-optical components or an assembly of components which are completely embedded along with the fibre at the time of manufacture. The micro-optics package could be based on a number of technologies. GRIN (Graded Index) lenses or fibres could be interfaced (e.g. spliced) to the embedded system fibre to provide beam collimation (for eased alignment to the other half of the interface).

10

It is necessary to 'find' the buried micro-optics with the machining laser (or alternative process). However, the target site could be readily identified prior to machining by embedding structures (e.g. metallic coatings) that would be visible on X-ray of the composite.

- 15 It is possible for the composite to comprise TEC optical fibres, possibly spliced to the embedded optical fibre or formed at the end of the system fibre to expand the core of the embedded fibre to relax alignment constraints at the point of connection.

- 20 The present invention enables a composite to be formed with embedded optical fibres and micro-optical components. The composite can be processed through any number of manufacturing steps until a finished composite is created. Then by X-ray imaging of the composite, the location of the optical fibres and the micro-optical components can be determined and markings can be provided for subsequent use on the composite. These markings represent drilling points for accessing the embedded optical fibres and the micro-
25 optical components.

Presently preferred embodiments of the present invention will now be described with reference to the accompanying drawings. In the drawings:

- 30 Figures 1a, 1b and 1c are schematic partial sectional views of an aircraft composite incorporating an optical fibre showing different stages of a method of interfacing to the embedded optical fibre as described in our co-pending UK patent application;

Figures 2a and 2b are schematic partial sectional views of aircraft composites each incorporating an optical fibre and an embedded optical port according to respective first and second embodiments of the present invention;

5

Figure 3a is a schematic partial sectional view of an aircraft composite incorporating an optical fibre and an embedded optical port according to a third embodiment of the present invention;

10 Figure 3b is a schematic partial sectional view of the aircraft composite of Figure 3a showing a method of forming a laser machined passageway to the embedded optical port;

Figure 4a is a schematic perspective view of an optical fibre in a polishing block which is used to prepare the optical fibre for side coupling in a fourth embodiment of the present
15 invention;

Figure 4b is a schematic sectional view of the polishing block and optical fibre of Figure 4a along the length of the polishing block;

20 Figures 5a, 5b and 5c are schematic partial sectional views of an aircraft composite incorporating the polished optical fibre of Figures 4a and 4b showing different stages of a method of interfacing to the embedded optical fibre according to the fourth embodiment of the present invention;

25 Figure 6a a schematic sectional view in a vertical plane of an aircraft composite incorporating an optical fibre and an embedded optical port according to a fifth embodiment of the present invention; and

Figure 6b a schematic sectional view in a horizontal plane of the aircraft composite of Figure
30 6a according to the fifth embodiment of the present invention.

Referring to Figures 1a, 1b and 1c, a method of coupling an optical fibre 10 embedded within a carbon fibre aircraft composite 12 to another optical fibre 14 provided externally of the

composite 12 as set out in our co-pending UK patent application, is now described. The optical fibre 10 is embedded at the time of manufacture of the composite 12 and is effectively hidden from the exterior surfaces 16 of the composite 12 at all possible points of connection as the optical fibre 10 does not extend to a connection surface 16 of the composite 12. In this way, the connection surfaces 16 of the composite 12 can be finished in the manufacturing process without damaging the optical fibre 10.

Figure 1a shows one end 17 of the aircraft composite 12, having the optical fibre 10 embedded therein, which has been through the finishing processes of manufacturing. Although not shown, the other end of the composite 12 may be similar to that shown in Figure 1a. In order to form an optical connection to the embedded optical fibre 10, the composite 12 is scanned by X-rays and the results thereof establish the exact location of the optical fibre 10 within the composite 12. It is not necessary to provide any special detection feature of the structure within the composite, as the location of the optical fibre can be readily determined. If image enhancement of the embedded structure is required, selective fibre coating (prior to embedment) could be used. The results are used to determine a drilling point 18 for creating access to the buried optical fibre 10 from the exterior of the composite 12.

Access to the buried optical fibre is established in the composite 12 by drilling a hole (passageway) 20 from the determined drilling point 18 through the composite 12 as shown in Figure 1b. Hole drilling is an accepted production practice and is routinely performed in composite manufacturing. The thus formed passageway 20 intersects the optical fibre 10 and severs it. In order to reinstate an optical finish on the face of the optical fibre 10, namely to form a high-quality optical interface at the severed portion 22 of the optical fibre 10, the severed portion 22 is then polished using a standard polishing process which requires no further explanation herein. However, it is to be appreciated that the polishing process is carried out from within the passageway 20.

A plug connection is then made to the polished end 24 of the severed optical fibre 12 as shown in Figure 1c. More particularly, a connector plug 26 having an internal optical transmission path 28 is inserted in the passageway 20 and positioned so as to optically align one end of the transmission path 28 with the polished severed end 24 of the optical fibre 10. The connector plug 26 functions to introduce/extract light to/from the embedded optical fibre

10 via the internal optical transmission path 28. Any alignment technique can be used, but in the present embodiment, alignment is built into the connector plug 26 by use of a three-axis translation micropositioning mechanism (not shown) which moves the internal optical transmission path 28 to optimise the optical coupling before fixing the relative position of the path and the plug 26 in the passageway 20 and hence the optical alignment.

An interface connector 30 is optically coupled to the other end of the internal optical transmission path 28 of the connector plug 26. In its connected state as shown in Figure 1c, an internal optical path 32 within the interface connector 30 leads from the connector plug 26 to the external optical fibre 14 which is attached to the interface connector 30. In this way, an optical connection between the embedded optical fibre 10 and the external optical fibre 14 can be established.

Whilst the connection between the embedded optical fibre 10 and the external optical fibre 14 has been shown at one end 17 of the composite 12, the above described connection procedure could be carried out at both ends of the composite 12. This procedure would connect external optical fibres 14 to either ends of the embedded optical fibre 10 which has no portion emerging from any exterior surface 16 of the composite 12. In this way, an optical fibre 10 completely encased within a composite 12 can be used for the transmission of optical signals or the sensing of environmental conditions to which the composite is exposed.

In an alternative (not shown) to the above described interconnection method, alignment constraints can be eased by using an expanded core fibre, such as a TEC (Thermally Expanded Core) optical fibre, at the interface site where the embedded optical fibre 10 has been severed. More particularly, the TEC optical fibre is spliced onto the optical fibre 10 and embedded within the composite. When the composite is scanned, the X-ray results identify the TEC optical fibre portion and the location of the drilling point 18 is set to create a passageway which will intersect this portion.

Referring now to Figure 2a, a first embodiment of the present invention is described. As there are some similarities between the interconnection of this embodiment and the above described interconnection method, the following description will be directed to the differences between this embodiment and the above to avoid unnecessary repetition.

A composite panel 40 including an embedded optical fibre 42 is used. The optical fibre 42 has a micro-optical component 44 provided at one end thereof which is also completely embedded within the composite panel 40 at the time of its manufacture. The micro-optical component 44 comprises e.g. a GRIN (Graded Index) lens which is bonded or fused to the embedded optical fibre 42 to provide beam collimation for eased alignment with another half of the interface (plug connector 26 and interface connector 30 as in the first embodiment). Alternatively, the GRIN lenses can be replaced by an appropriate length of GRIN (Graded Index) fibre.

Prior to finishing of the manufacturing processes on the composite panel, the location of the micro-optical component 44 is determined by use of an imaging technique such as X-ray scanning and a passageway 46 to the micro-optical component 44 is formed, by drilling for example. The passageway 46 in this embodiment is formed in-line with the micro-optical component 44 via an end face of the composite 40. The thus formed passageway 46 is then temporarily sealed with a protective plug 48 to protect the embedded micro-optical component 44 from the subsequent composite finishing processes. Once the finishing processes have been completed, the plug 48 can be removed to provide access to the buried micro-optical component 44 and hence the embedded optical fibre 42. Removal of the plug 48 thereby provides an interface port to the embedded optical fibre 42 via an embedded high-quality optical surface 50 provided by the micro-optical component 44. Links to the outside world are then installed using a connector plug and interface connector (not shown) in a similar way to the first described interconnection method.

If required, the high-quality optical surface 50 can be covered with a protective coating (not shown) which is removable by chemical etching for example, just prior to forming the optical connection. In addition, whilst GRIN lenses have been used in the above described embodiment, it is also possible to replace these with GRIN fibres that perform essentially the same operation.

A second embodiment of the present invention is now described with reference to Figure 2b. The second embodiment is very similar to the first embodiment and, accordingly, to avoid unnecessary repetition, only the differences will be discussed hereinafter.

In the second embodiment, it is desired to connect to the embedded optical fibre 42 from an upper side face 52 of the composite 40. Accordingly, the micro-optical component 44 is provided with a micro-turning mirror 54 for controllably steering the direction of light emitted from the embedded optical fibre 42 via the micro-optical component 44. In the present embodiment, the light is reflected and turned through 90° using the micro-turning mirror 54 having a 45° mirror angle. As the resultant light beam is steered towards the upper side surface 52 of the composite 40, a passageway 56 is provided from the upper side surface 52 of the composite 40 to the micro-turning mirror 54. The passageway 56 is then sealed with the protective plug 48 until the manufacturing processes being carried out on the composite 40 have been completed as in the previously described first embodiment. The formation of ports could be performed after composite finishing, where the plugs merely provide protection of the interface until some later time when the connection is made.

An alternative light beam processing element to the micro-turning mirror 54, which could be used if required to provide beam steering, is a beam splitter (not shown). Other micro-optical structures that could be embedded include gratings, wave-guides, evanescent couplers, wave-plates, holograms and optical filters. These structures could be involved in system interrogation as well as providing an optical interface.

Referring now to Figure 3a, a third embodiment of the present invention is now described. The third embodiment is similar to the second embodiment described above and accordingly only the differences will be described hereinafter. In this embodiment, the composite is manufactured and finished without any pre-formed and plugged passageway to the optical processing element. Rather, the passageway is only formed after manufacture of the composite has been fully completed. More specifically, the composite panel 40 comprises an embedded optical fibre 42, beam collimating micro-optical component 44 and a beam turning mirror 54 as in the second embodiment. However, the turning mirror 54 has specific wavelength selectivity as will be described in detail later. The composite also comprises a machining beam stop 58 provided at an underside of the turning mirror 54 and a metallic position marker 60 which is readily detectable by an imaging technique.

Once the composite has been completed, it is X-rayed to determine the precise location of the position marker 60. A drilling point (not shown) is determined and marked on the composite surface. Then a precision laser machining technique as illustrated schematically in Figure 3b is used to create a passageway 62 from the drilling point through the composite 40 to the position marker 60 and the turning mirror 54. An Eximer laser (for example) together with focusing optics 64 are used as it allows accurate and controlled ablation of composite panel material (e.g. carbon fibre) on a pulse by pulse basis.

This approach requires protection of the embedded optical fibre 42 and micro-optical component 44 to ensure that they are not damaged during the laser machining process. Accordingly, the top surface of the turning mirror 54 is provided with a protective sacrificial coating 66 that can be removed by the Eximer laser after the passageway 62 has been formed. The coating 66 is metallic and aids the machining process because the light reflectivity of the bottom of the passageway 62 is monitored during its formation such that it is possible to determine when this coating 66 had been reached, namely when the passageway is at the correct depth. Then the laser can be set to remove a predetermined thickness of material corresponding to the thickness of the protective coating. Alternatively, the coating can be made of a material such as copper which can be selectively ablated by the laser (due to specific light wavelength absorption characteristics) or selectively chemically etched without damaging the surfaces of the carbon fibre composite 40. In modification to the present embodiment, the position marker (target) 60 can be omitted and the metallic coating 66 can provide its function as it is readily detectable by the X-ray imaging technique.

In the present embodiment, the optical transmission wavelengths and laser machining wavelengths are selected to be different. Also, the turning mirror 54 has a wavelength selective reflectance characteristic to ensure that the machining laser radiation is not coupled into the embedded optical fibre 42. More specifically, the turning mirror 54 has a characteristic which transmits the laser machining wavelengths of light and reflects the optical transmission wavelengths of light. The absorbing beam stop 58 is positioned so as to absorb the laser radiation once it has created the passageway 62 and has been transmitted through the turning mirror 54.

Once the passageway 62 has been created, the connection to the embedded optical fibre 42 is carried out in a similar manner to that described in the previous embodiments.

A fourth embodiment of the present invention is now described with reference to Figures 4a, 4b, 5a, 5b and 5c. In this embodiment, the coupling to an optical fibre 70 is effected to a side portion thereof to form a so called evanescent coupling. The purpose of having evanescent coupling is that it enables a branching structure to be created such that the signal being transmitted along the optical fibre 70 can be split between the existing embedded optical fibre 70 and another optical fibre 72 external to a composite 74 in which the fibre 70 is provided. This form of coupling is used to allow side-access to fibres in an efficient way.

Figures 4a and 4b show a pre-conditioning procedure employed for creating a side coupling to the optical fibre 70. The procedure involves placing the optical fibre 70 in a polishing block 76 which is arranged to retain the optical fibre 70 with a side portion 78 slightly protruding from a polishing surface 80 of the block 76. The protruding side portion 78 of the optical fibre 70 is then polished using any standard polishing technique which is well known to the skilled addressee.

Once the side portion has been polished, the optical fibre 70 is embedded within the composite 74 in such a way as to facilitate coupling to the polished portion 78. More particularly, as can be seen clearly in Figure 5a, an embedded evanescent coupler block 82 is provided at the polished side region 78 to provide support for the optical fibre 70 at the predetermined point of connection. The optical fibre 70 and the coupler block 82 are embedded within the composite 74 such that any manufacturing processes acting on the exterior surfaces of the composite do not cause any effect to the optical fibre 70 or the coupler block 82.

In this embodiment, the coupler block 82 also acts as a post-manufacture position locator for a coupling point and is easily detected by the results of an X-ray scan of the composite 74. Once the scan is completed, a machining point is determined for machining down to the coupler block 82 and the composite 74 is machined to create a shallow passageway 84 for access to the polished side portion 78 of the optical fibre 70 as shown in Figure 5b.

The thus formed passageway 84 is of a size sufficient to house an evanescent interface coupler block 86. The interface coupler block 86 supports an end of the external optical fibre 72 which also has a polished side surface. In order to effect coupling, the interface coupler block 86 and the coupler block 82 are connected together to optically align the respective polished side portions of their optical fibres 70, 72.

In another embodiment (not shown), the optical fibres 70, 72 with polished side portions are replaced by D-fibres in the composite 74. D-fibres are similar to side polished fibres and have a flat side close to the fibre core which gives them a reduced alignment tolerance compared to other optical fibre geometries. At a region of connection, the D-fibres are provided with support blocks for ease of interfacing.

A fifth embodiment of the present invention, as shown in Figures 6a and 6b, is now described. This embodiment is also very similar to the previously described third embodiment and, so to avoid unnecessary repetition, only the differences are described hereinafter.

The principle difference is that, for ease of manufacture, the micro-optical component 90 is formed on a micro-substrate 92 that is also embedded within the composite panel 94. The micro-substrate 92 is formed from silicon though alternatively other materials can be used. The machining of silicon is relatively easy and enables connecting structures such as grooves, pockets, reflectors and alignment markers (not shown) to be formed. These connecting structures perform two connectivity functions. Firstly they enable the micro-optical component 90 and the optical fibre 96 to be aligned and secured together with high precision on the micro-substrate 92, and secondly, they enable the combination of the micro-optical component 90 and embedded optical fibre 96 to be coupled to the external connector (not shown) accurately and reliably. The micro-substrate 92 is embedded at the time of composite manufacture.

The micro-optical component 90 can comprise lenses/optics/prisms as well as windows or coatings to protect their optical surfaces prior to being exposed for connection. All of the assembly is embedded during manufacture. It can also include target markers for X-ray/C-scan location of the assembly.

A process that can be used to create alignment structures for the micro-optical components 90 is the so called LIGA (Lithographie Galvanoformung and Abformung) process which is based on X-ray lithography. This process uses deep X-raying of a resist layer and subsequent electroplating to form accurately aligned structures. This can provide alignment structures in metals and ceramics and (from a master structure) allow high-volume replication in other materials such as composites manufactured out of strong plastics materials such as PMMA (Polymethylmethacrylate) and PEEK (Polyethylene terephthalate). The substrate 92 can be formed from various processes, this is but one. Other processes include etching of silicon or laser machining. The aligned substrate 92 and micro-optical components 90 are designed to be rugged enough to survive both the manufacturing process and the operational environment of the aircraft/composite structure.

Some optical processing elements, especially those without rotational symmetry may be susceptible to misalignment during the composite cure process. A substrate containing these elements would minimise such movement. The natural ply structure of the composite material may also make the substrate lie 'flat' further improving alignment to other structures.

Other micro-optical structures that could be used as the beam processing elements in the above embodiments include gratings, wave-guides, evanescent couplers, wave-plates, holograms and optical filters. These structures could be involved in system interrogation as well as providing an optical interface.

Having described particular preferred embodiments of the present invention, it is to be appreciated that the embodiments in question are exemplary only and that variations and modifications such as will occur to those possessed of the appropriate knowledge and skills may be made without departure from the spirit and scope of the invention as set forth in the appended claims. For example, whilst X-ray imaging is a preferred way of detecting the location of the embedded optical fibre and/or the micro-optical components, other techniques may also be suitable such as ultrasonic imaging. Also, the use of a substrate can equally well be used to align an optical fibre to an evanescent or D-fibre coupler.

CLAIMS:

1. A composite comprising an optical transmission means embedded within a carrier, and a high-quality optical interface surface provided within the carrier in connection with the optical transmission means, the optical interface surface providing a means for optical connection to the transmission means from outside the carrier.
2. A composite according to Claim 1, further comprising a passageway formed within the carrier to the embedded optical transmission means.
3. A composite according to Claim 2, further comprising a protective plug provided in the passageway for closing the passageway, the protective plug being removable prior to forming an optical connection.
4. A composite according to Claim 2 or 3, further comprising means for preventing laser irradiation light used in the formation of the passageway from being optically coupled with the optical transmission means.
5. A composite according to Claim 4, wherein the preventing means is arranged to differentiate between the wavelengths of laser light used in the formation of the passageway and the light used in the optical transmission means, and to prevent transmission of light used in the formation of the laser irradiated passageway to the optical transmission means.
6. A composite according to Claim 4 or 5, wherein the preventing means comprises at least one wavelength selective mirror or beam splitter and a light beam absorbing means embedded at an appropriate position within the carrier.
7. A composite according to any preceding claim, further comprising detectable locating means arranged to be used in locating the position of the high-quality optical surface from the exterior of the carrier.
8. A composite according to Claim 7, wherein the locating means comprises an embedded detectable position marker within the composite.

9. A composite according to Claim 7 or 8 as dependent on any of Claims 4 to 6, further comprising a depth marker embedded within the composite to indicate when the passageway has been formed to the correct depth.
10. A composite according to Claim 9 as dependent on Claim 8, wherein the depth marker comprises the position marker.
11. A composite according to any of Claims 7 to 10 as dependent from any of Claims 2 to 6, wherein the position marker or the depth marker comprises a sacrificial coating which is arranged to be removable after the formation of the passageway to access the optical transmission means.
12. A composite according to Claim 11, wherein the coating comprises a reflective coating.
13. A composite according to Claim 12, wherein the coating comprises a metallic coating.
14. A composite according to any preceding claim, wherein the optical interface surface comprises a thermally expanded core optical fibre connected to the optical transmission means.
15. A composite according to any preceding claim, further comprising an alignment structure embedded within the carrier for aligning an interface means with the optical transmission means via the optical interface surface.
16. A composite according to any preceding claim, further comprising optical processing means embedded within the carrier, the optical processing means being optically connected to the optical transmission means for processing light to or from the optical transmission means and providing the optical interface surface.
17. A composite according to Claim 16, wherein the optical processing means comprises means for steering a light beam.

18. A composite according to Claim 17, wherein the steering means comprises a beam splitter or a micro-turning mirror.
19. A composite according to any of Claims 16 to 18, wherein the optical processing means comprises means for collimating a light beam.
20. A composite according to Claim 19, wherein the light beam collimating means comprises a graded index lens or a graded index fibre.
21. A composite according to any of Claims 16 to 20, wherein the optical processing means comprises at least one of the group comprising an optical grating element, a waveguide, a wave plate, a hologram and an optical filter.
22. A composite according to any of Claims 16 to 21, further comprising a micro-substrate on which the optical processing means is provided and secured to the optical transmission means.
23. A composite according to Claim 22 as dependent on Claim 15, wherein the alignment structure is provided on the micro-substrate.
24. A composite according to any preceding claim, wherein the optical transmission means comprises an elongate structure and the optical interface surface is provided at a side of the elongate structure.
25. A composite according to Claim 24, wherein the optical interface surface is provided by an evanescent coupling means optically connected to the optical transmission means.
26. A composite according to Claim 24, wherein the optical transmission means comprises a D-fibre which can be optical coupled to another D-fibre by aligning flat faces of the D-fibres together to form the optical connection.

27. A composite according to Claim 26, further comprising a support structure for the D-fibre at the optical interface surface.
28. A composite according to any preceding claim, wherein the optical transmission means comprises an optical fibre.
29. A composite substantially as described hereinbefore with reference to the accompanying drawings.

Fig.1a.

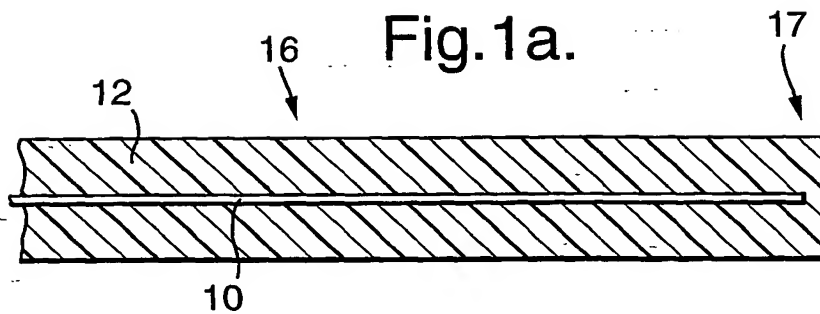


Fig.1b.

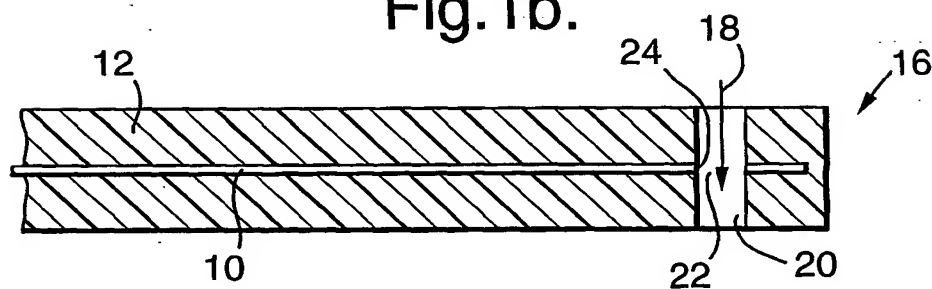


Fig.1c.

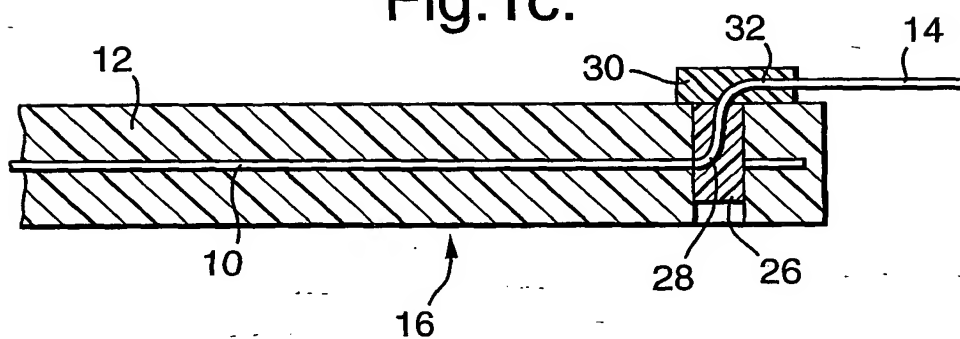


Fig.2a.

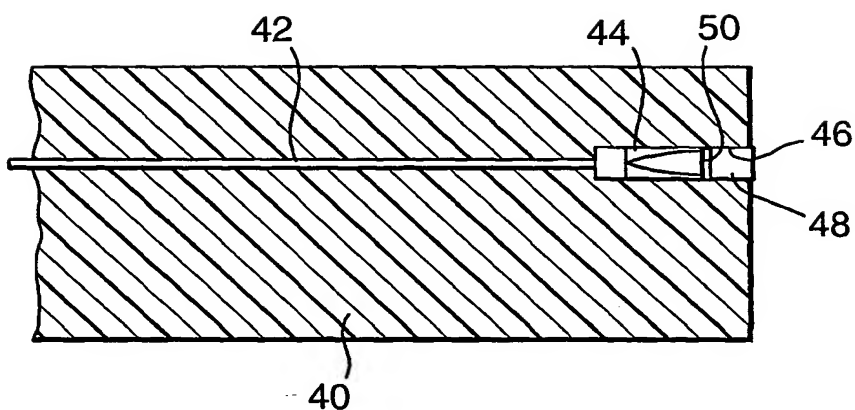


Fig.2b.

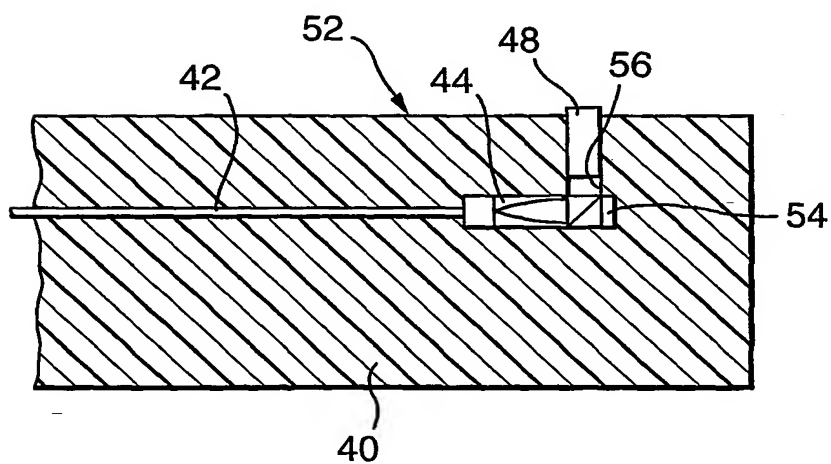


Fig.3a.

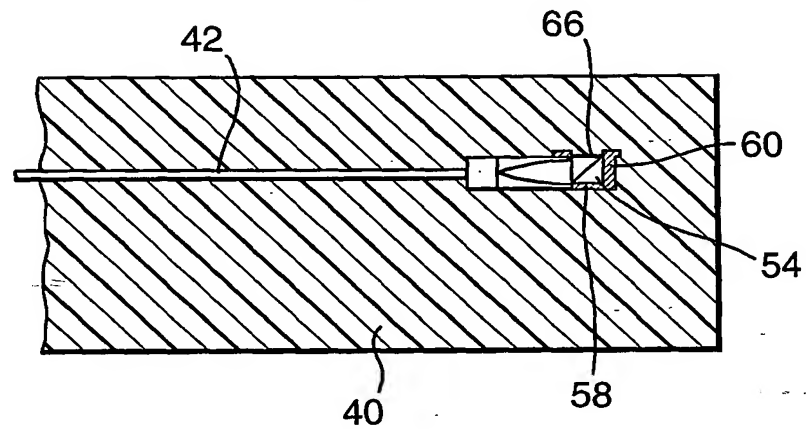


Fig.3b.

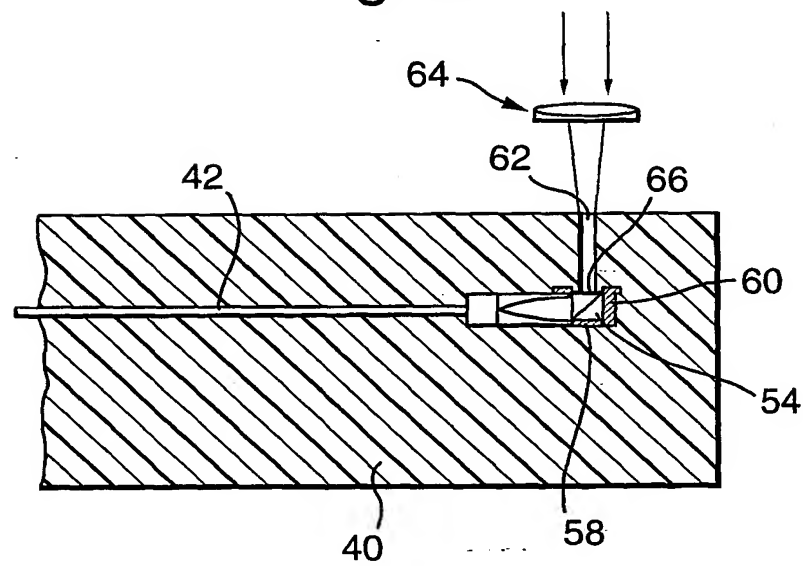


Fig.4a.

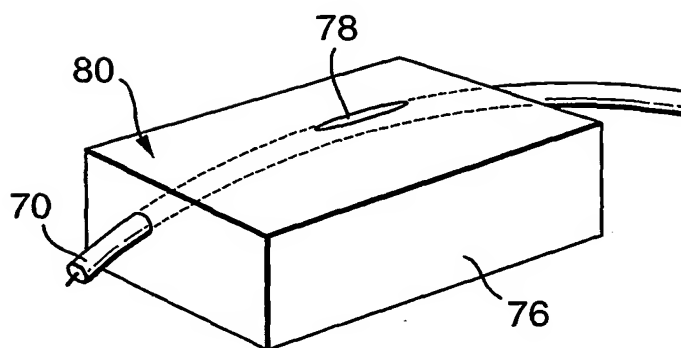


Fig.4b.

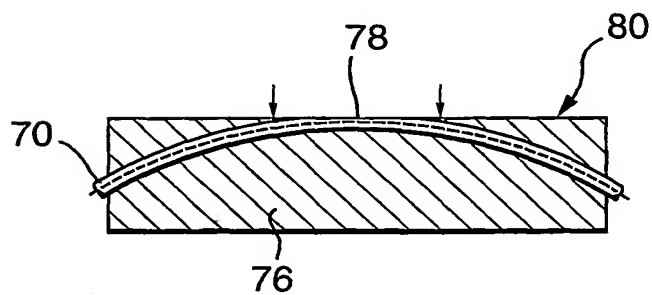


Fig.5a.

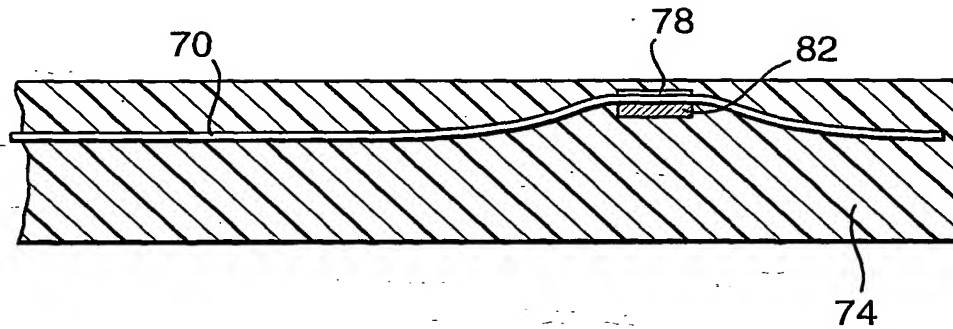


Fig.5b.

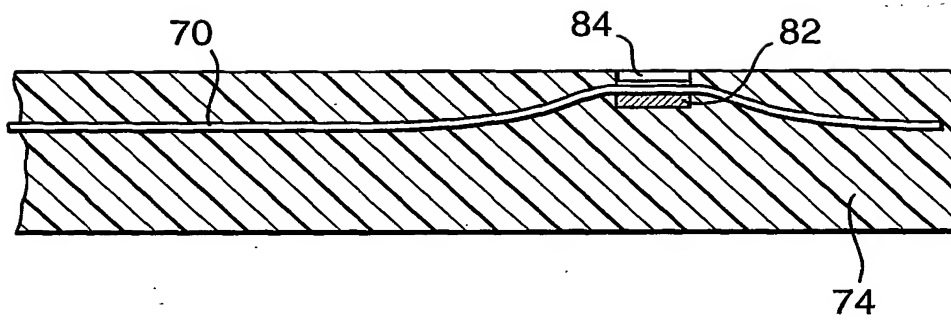


Fig.5c.

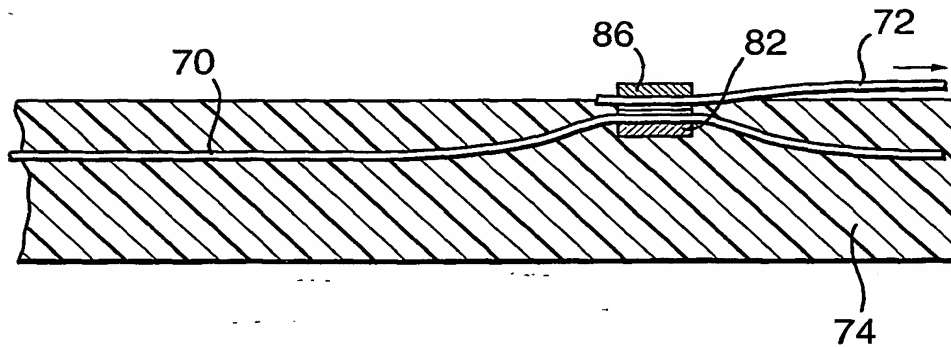


Fig.6a.


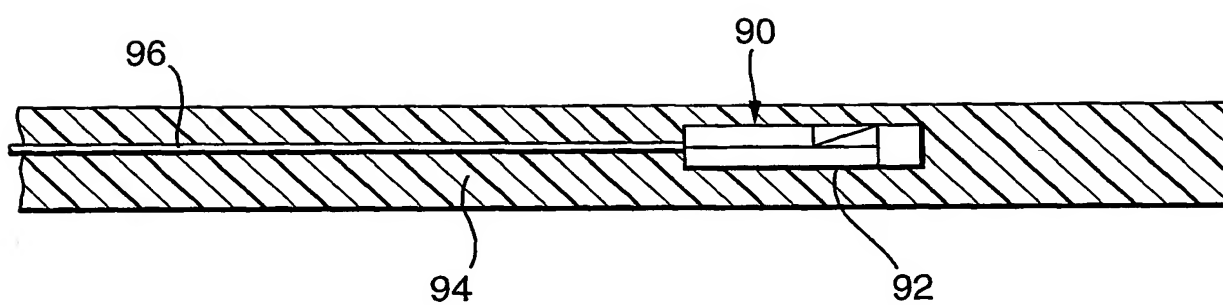


Fig.6b.

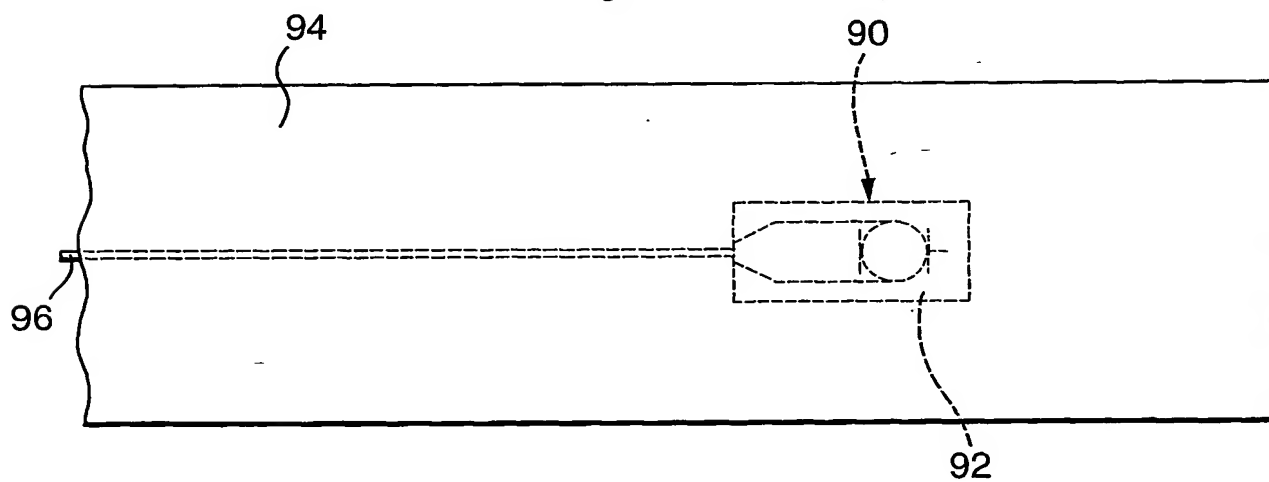

INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/00035

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G02B6/43 G02B6/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	EP 0 683 409 A (BELL TELEPHONE MANUFACTURING) 22 November 1995 (1995-11-22) cited in the application abstract; figures 1,2	1, 2, 28, 29
Y	L. BALLIET ET AL: "OPTICAL TRANSMISSION SYSTEM FOR INTERCONNECTING ELECTRONIC UNITS" IBM TDB, vol. 26, no. 4, September 1983 (1983-09), pages 1793-1796, XP002164432 NEW YORK the whole document	1, 2, 28, 29

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the international filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

2 April 2001

Date of mailing of the international search report

20/04/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Malic, K

INTERNATIONAL SEARCH REPORT

Inte Application No

PCT/GB 01/00035

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 299 273 A (D.EVANS) 29 March 1994 (1994-03-29) cited in the application abstract; figure 1 -----	1, 2, 28, 29

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Application No

PCT/GB 01/00035

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0683409 A	22-11-1995	AU 694197 B	16-07-1998
		AU 2007295 A	23-11-1995
		NZ 272085 A	24-02-1997
		US 5809197 A	15-09-1998
US 5299273 A	29-03-1994	NONE	

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)